



CL = CENTER LINE
R/W = RIGHT OF WAY
MIN = MINIMUM

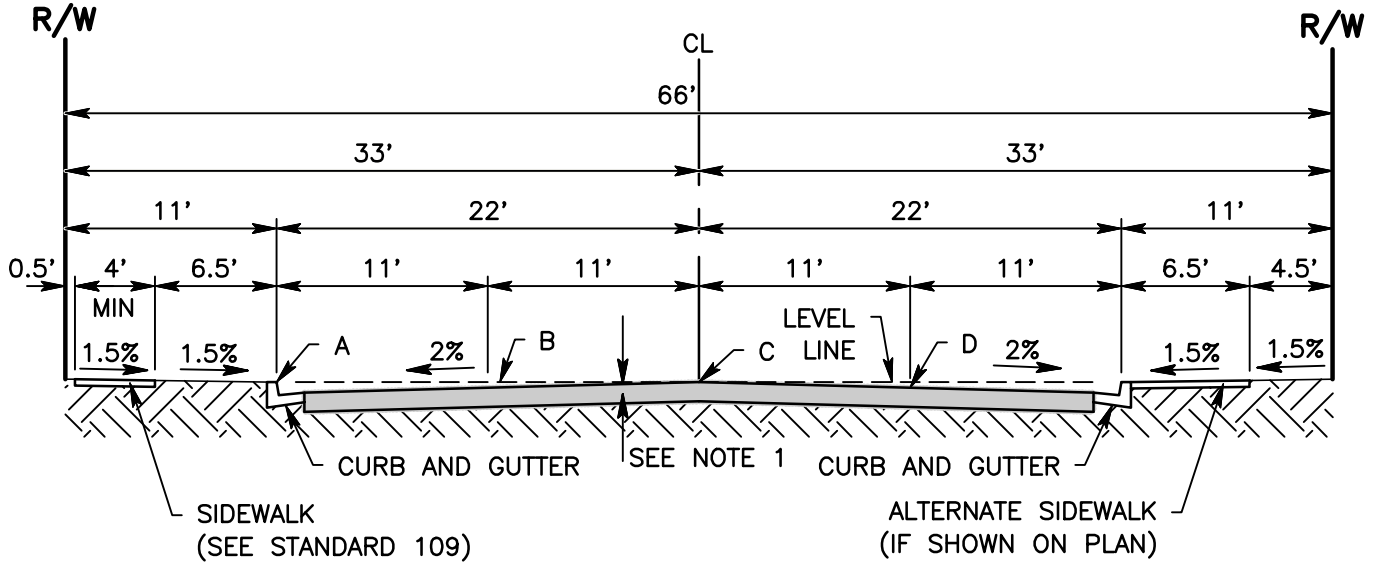

TYPICAL SECTION
LEVEL

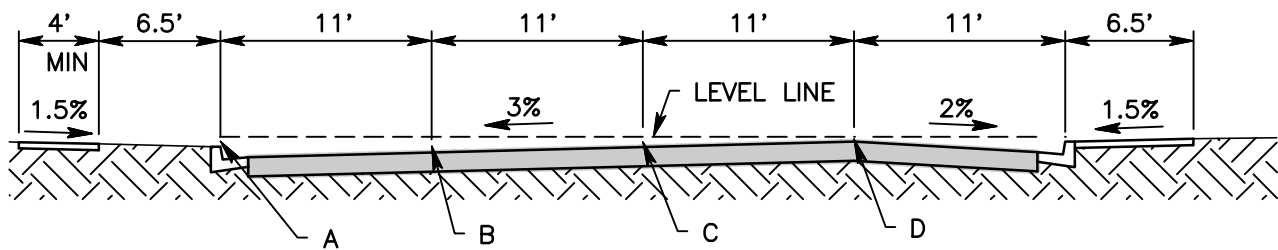

TYPICAL SECTION
TILT

JOINT ELEVATIONS		A	B	C	D
8" CURB	LEVEL	0.00'	0.36'	0.14'	0.36'
	TILT	0.76'	1.02'	0.69'	0.36'
6" CURB	LEVEL	0.00'	0.19'	(0.03')	0.19'
	TILT	0.76'	0.85'	0.52'	0.19'

() INDICATES ABOVE LEVEL LINE

NOTES:

1. STRUCTURAL SECTION OF ROADWAY SHALL BE DETERMINED FROM SOILS TESTS AND SO INDICATED ON CONSTRUCTION PLANS.
2. MINIMUM DESIGN PAVING THICKNESS SHALL BE 0.20' ASHPALT CONCRETE.
3. CONSTRUCTION OUTSIDE RIGHT OF WAY LINE WILL REQUIRE SLOPE EASEMENTS.
4. CROSS SLOPE FOR SIDEWALK SHALL NOT EXCEED 1.5% OR MEET ADA COMPLIANCE.



SAN BERNARDINO COUNTY DEPARTMENT OF PUBLIC WORKS

COLLECTOR STREET

BRENDON P. BIGGS, PE
DIRECTOR OF PUBLIC
WORKS/ROAD
COMMISSIONER